


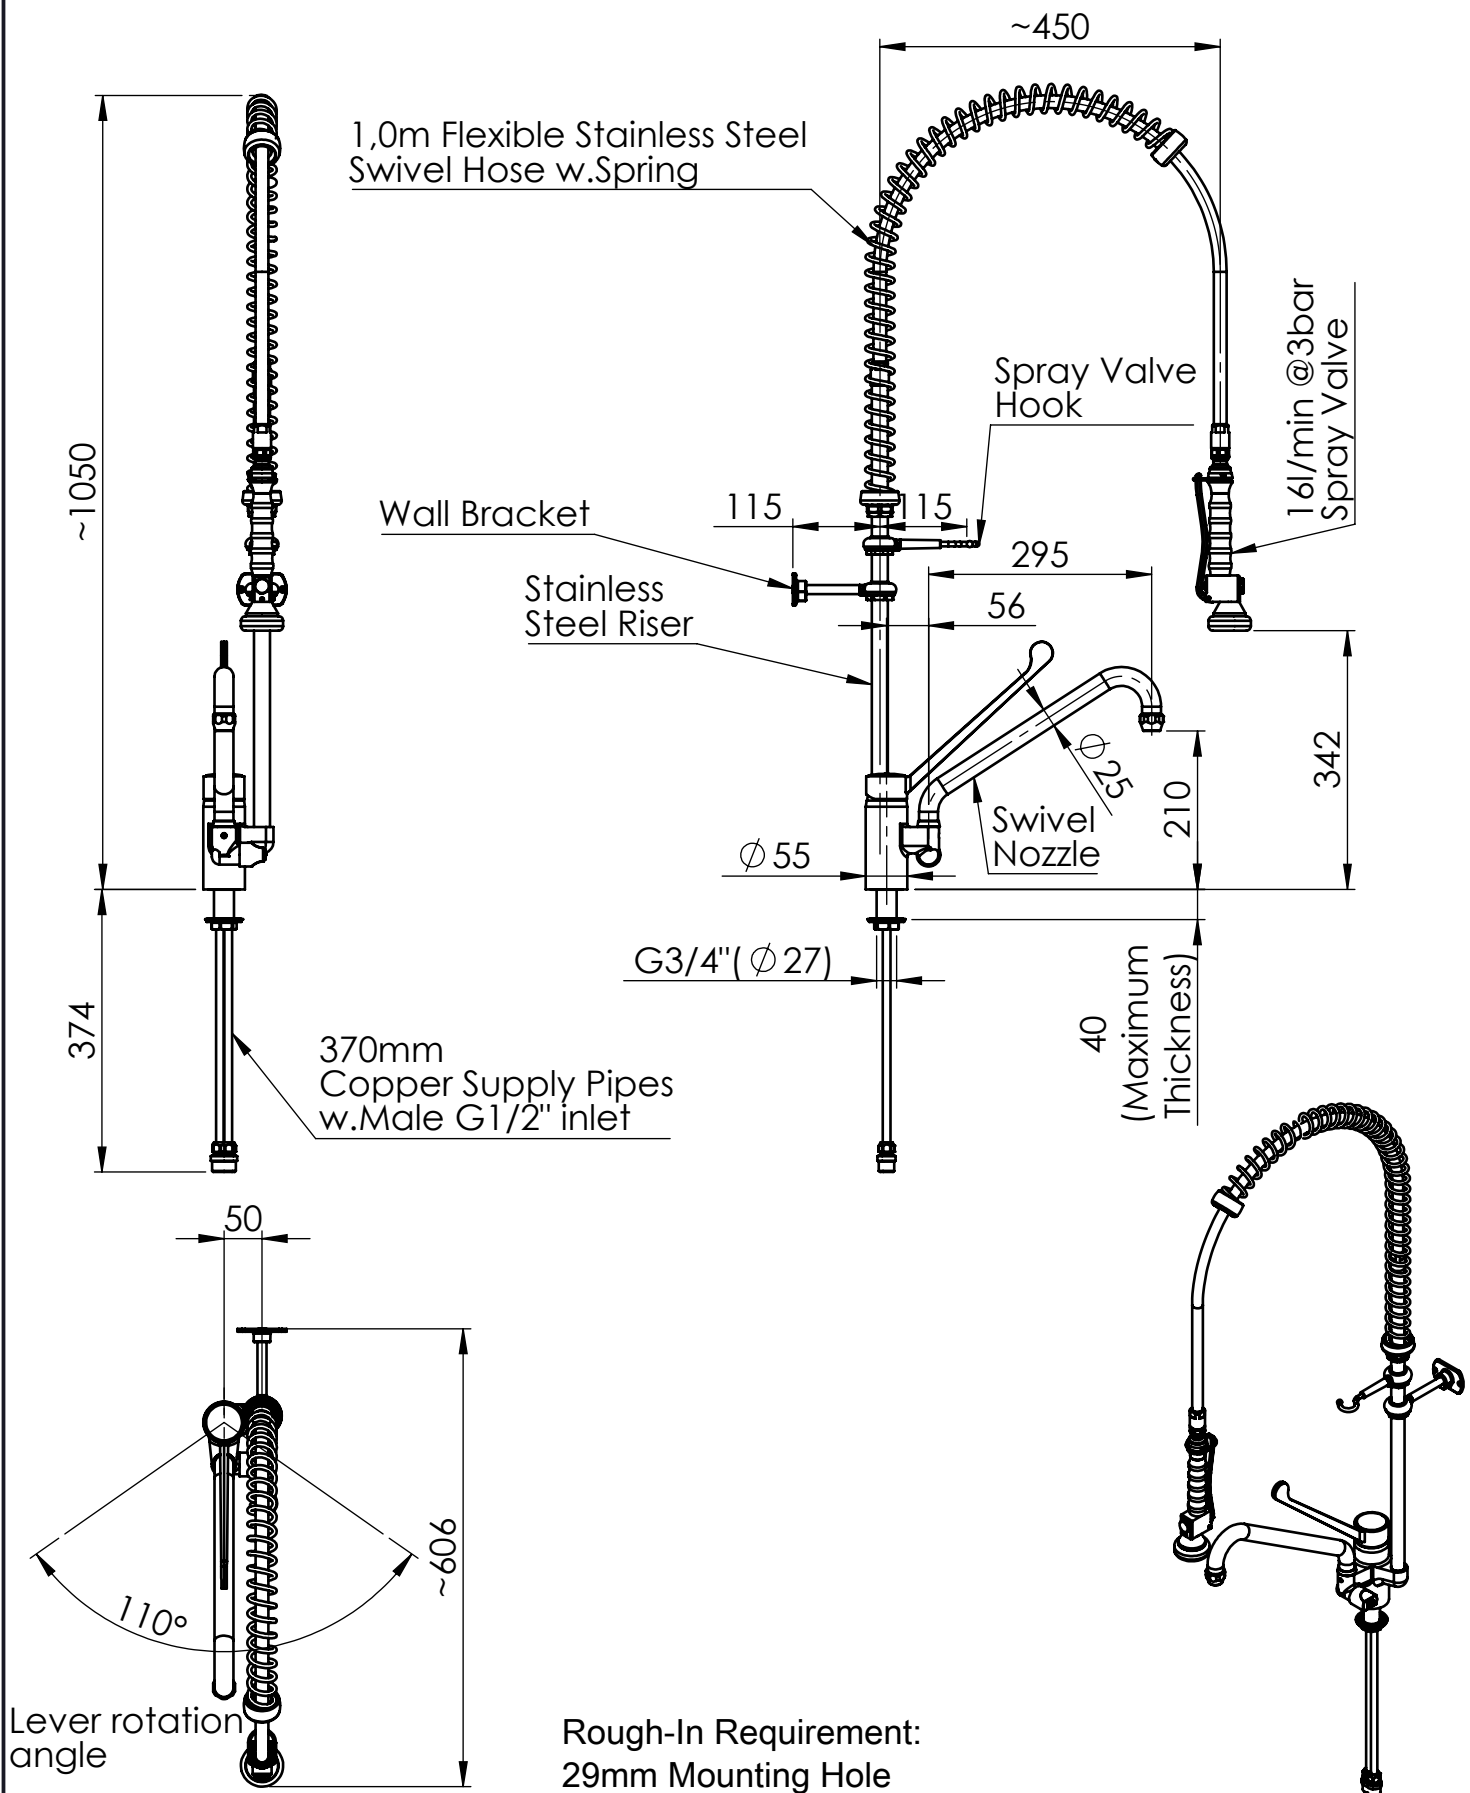

Rough-In Requirement:
29mm Mounting Hole

TITLE / DESCRIZIONE


Single hole, mixing temperature, deck mount Pre-Rinse Unit with 220mm long Sanitary Lever and 295mm swivel nozzle (Ø 25mm), switch for spray valve/ nozzle. 50mm-long mounting shank, G1/2" male inlets with check valves, high flow ceramic cartridge, riser tube - stainless steel, brass, chrome plated, Sanitary Lever - fiber glass reinforced Polyamide. 16L/min KLARCO "NEW" spray valve

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS	CHD / VER	APPR
SCALE / SCALA 1:10	DATE / DATA 28/02/2020	SHEET / PAG 1 of 2
NUMBER / CODICE DIS.	MODEL / PRODOTTO 2E.2914.87.72	A4V

ITEM NO.	SALES NO.	DESCRIPTION
1	P020	SPRAY VALVE "NEW M1/2" BLACK
2	P074	FLAT GASKET 1/2" Ø18,5x11 sp.2mm
3	P005	OVERHEAD SPRING "GREY"
4	P004	100cm Ø17 F1/2"xF1/2" FLEXIBLE HOSE
5	P007	SPRING CHROMED SUPPORT
6	P001	650mm G1/2" RISER W.O-Ring
7	P034	115mm WALL BRACKET CHROMED
8	P035	SPRAY VALVE CHROMED SUPPORT
9	H002	ELBOW OPERATED GRAY LEVER (L.220mm)
10	V070	Ø47 MIXING CARTRIDGE
11	P388	O-RING 18x1,5 EPDM 70sh.
12	V0C0/D	1/2" CERAMIC HEADWORK (RH)
13	H010	DIVERTER KNOB
14	P158	O-RING 106 (Ø6.75x1.78), EPDM 70
15	P498	COPPER PIPE L.420mm w.O-RING
16	P110	Compression Male G1/2 fitting
17	P030	BACKFLOW PREVENTER DW15/DN10
18	P236	SPOUT SCREW (short)
19	P592	SWIVEL SLEEVE
20	P072	O-Ring 119 (Ø 15,08 x 2,62mm) EPDM 70
21	P613	#2 OR+#1 SWIVEL SLEEVE KIT FOR FAUCET/OUTLET
22	P014	STREAM REGULATOR OUTLET (Ø25 SPOUT)
23	C087	SWING NOZZLE Ø25x295 h.130

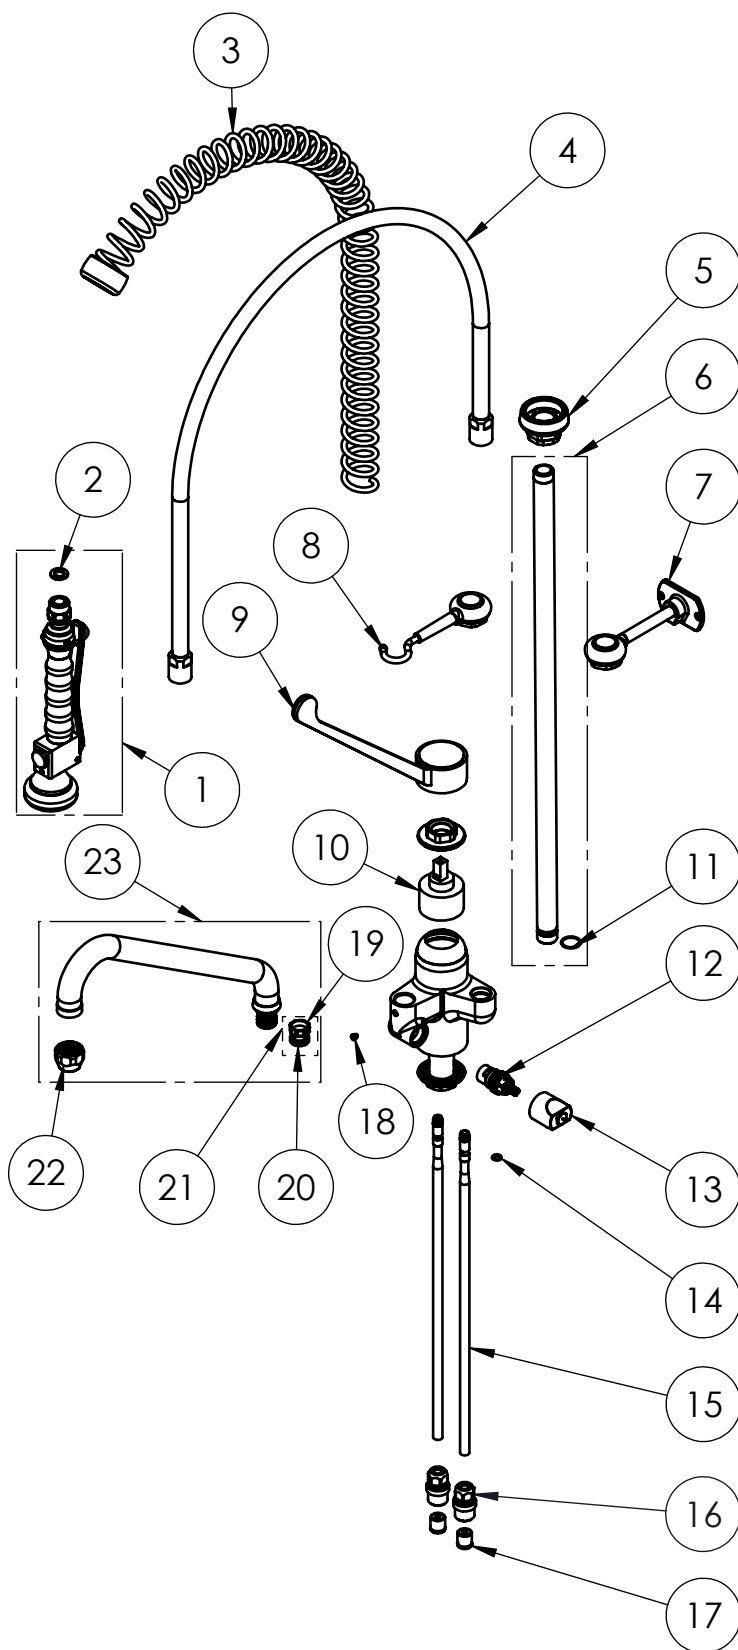

TITLE / DESCRIZIONE

Single hole, mixing temperature, deck mount Pre-Rinse Unit with 220mm long Sanitary Lever and 295mm swivel nozzle (Ø 25mm), switch for spray valve/ nozzle. 50mm-long mounting shank, G1/2" male inlets with check valves, high flow ceramic cartridge, riser tube - stainless steel, brass, chrome plated, Sanitary Lever - fiber glass reinforced Polyamide. 16L/min KLARCO "NEW" spray valve

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS	CHD / VER	APPR
SCALE / SCALA 1:8	DATE / DATA 28/02/2020	SHEET / PAG 2 of 2
NUMBER / CODICE DIS.	MODEL / PRODOTTO 2E.2914.87.72	A4V